


Wafer Check Valve



Wide damper opening distance.
 Demper closure with spring.
Spring from AISI 316 Stainless Steel

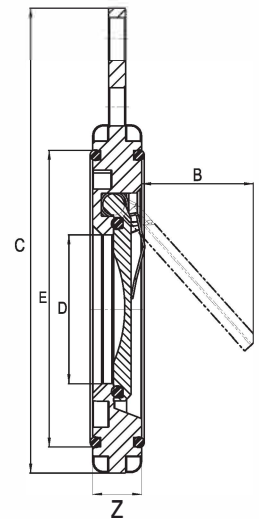


mm	Code	DN	D	PN	E	C	Z	B
90	131530	80	53	16	113	192	20	62
110	131531	100	70	16	140	219	23	85
125	131532	100	91	16	161	251	23	90
140	131533	125	91	16	161	251	23	100
160	131534	150	100	10	202	281	25	152
200	131535	200	125	10	240	330	33	162
225	131536	200	125	10	240	330	33	160
250	131537	250	170	10	315	325	38	175
280	131538	250	170	10	315	325	38	190
315	131539	300	220	10	365	380	43	225

Wafer Check Valve - Flanged



Wide damper opening distance.
 Demper closure with spring.
Spring from AISI 316 Stainless Steel
 Complete with flange adaptors,
 flanges, bolts and nuts.

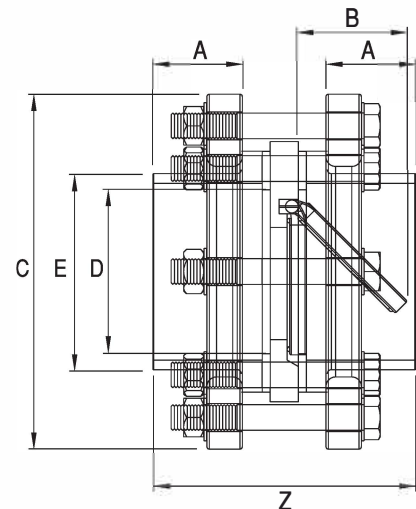

mm / inch	Code 1 / Code 2	B	A	C	E	D / ASTM	Z	PN	Box
90 / 3"	131502 / 131502ASTM	62	44	201	107	90 / 88.9	133	16	1
110 / 4"	131503 / 131503ASTM	85	55	219	123	110 / 114.3	168	16	1
125 / -	131504 / -	90	62	249	139	125 / -	178	16	1
140 / -	131505 / -	100	66	249	155	140 / -	182	16	1
160 / -	131506 / -	152	90	283	189	160 / -	206	10	1
200 / -	131507 / -	162	112	340	175	200 / -	258	10	1
225 / -	131508 / -	160	126	340	200	225 / -	286	10	1
250 / -	131509 / -	175	132	394	275	250 / -	350	10	1
280 / -	131510 / -	190	145	400	305	280 / -	380	10	1
315 / -	131511 / -	225	163	445	342	315 / -	415	10	1